

**DIAMANT Crono Electric Actuator with ISO 5211 Multi-flange Mounting**




**STANDARD SPECIFICATION:**

- **Power Supply (110V Version on Request)**  
230V—24V AC
- **Input Power**  
7 VA (230V 50 Hz)  
7.5 VA (24V 50 Hz)
- **Standard Operating time (90° Rotation)**  
35 sec (11Nm)
- **Degree of Protection**  
IP 65
- **Operational room temperature (Lower Temperatures on Request)**  
-10°C to +50°C
- **Adjustment Range**  
-15°C to +85°C
- **ISO 5211 Connection**  
FO3—FO5


**DIAMANT Crono Electric Actuator with ISO 5211 Multi-flange Mounting**

**DIAMANT Crono ISO 5211 Mount**

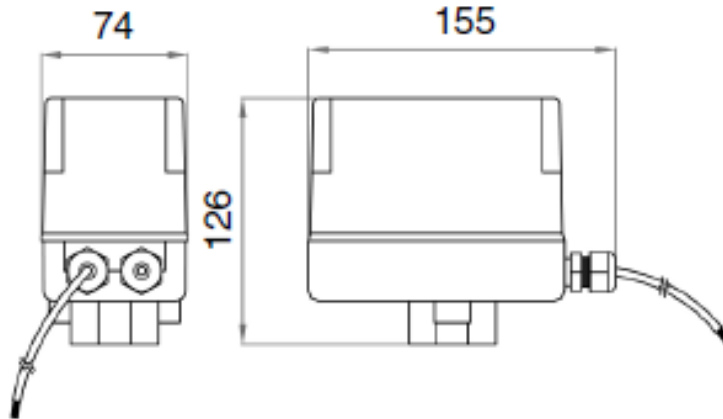

**Wiring Diagram**

**ON/OFF Actuator with Built in Programmable Timer**

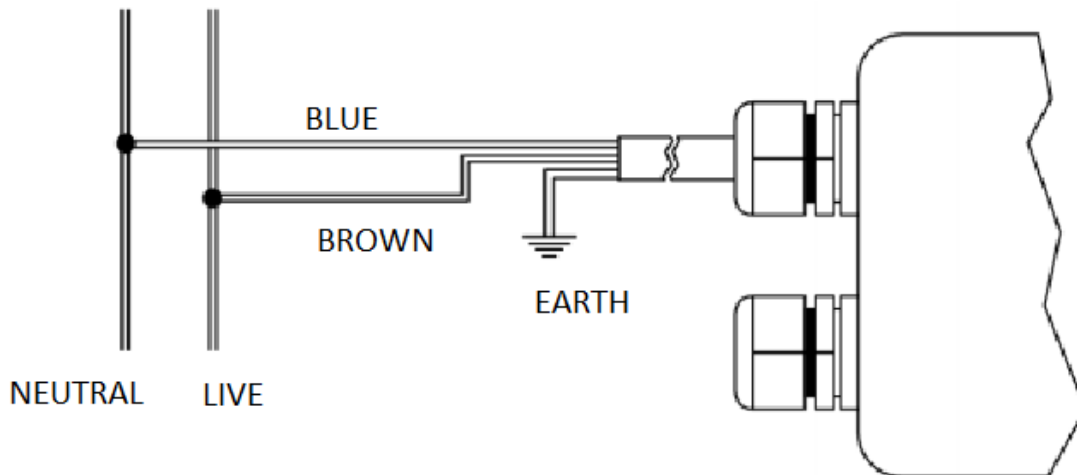

Dimensions in mm unless otherwise stated.

For details on the DIAMANT Crono Actuators please contact V-Flow Solutions for data sheets.

Information subject to alteration without prior notice