





D362/363 Series, Vacuum – 3/2 Normally Closed

Specifications	
Function (single acting)	 <p>Flow direction underseat 2 → 1</p>
Maximum Viscosity	Max. 21cST (3 °E)
Body Material (Std)	Brass CW617N (EN 12165)
Orifice Material	Stainless Steel 1.4305 EN 10088 (AISI 303)
Flange	Stainless Steel 1.4305 EN 10088 (AISI 303)
Tube	Stainless Steel AISI 304
Plunger	Stainless Steel 1.4106 EN 10088 (AISI 430F)
Top Stop	Stainless Steel 1.4105 EN 10088 (AISI 430F)
Springs	Stainless Steel AISI 302
Seal Material (Std)	Foodgrade FKM
Connection Type (Std)	G parallel thread (ISO 228-1)
Shading Ring	Copper
Electrical Characteristics	
Standard and Class H Coil Voltage DC (=)	24 V
Standard and Class H Coil Voltage AC 50 Hz (-)	24 V, 110 V, 200 V, 230 V
Standard and Class H Coil Voltage AC 60 Hz (-)	24 V, 120 V, 220 V, 240 V
 Coil Voltage DC (=)	24 V
 Coil Voltage AC 50 Hz (-)	24 V, 110 V, 230 V
 Coil Voltage AC 60 Hz (-)	120 V, 240 V
Voltage Tolerance	+10% to -15% (AC)
	+10% to -5% (DC)
Duty Cycle	100% ED
Protection Class	IP65 (EN 60529) with plug and gasket correctly fitted *
Electrical Connection	to EN 175301 - 803 - A (ex DIN 43650)
Coil Insulation	Class F 155 °C
Power Rating (Standard and Class H)	AC 18 VA (holding) AC 36 VA (inrush) DC 14 W
	AC 15 VA (holding) AC 30 VA (inrush) DC 10 W

Features and Benefits

- Direct Acting
- Robust construction for industrial applications
- Configuration suitable for vacuum
- Zero pressure rated
- Stainless steel AISI 430F operators with low residual magnetism
- Coils tested 100% in compliance to RoHS directive and to relevant international standards
- High quality seal materials
- Response time 5 to 25 ms




Pipe Size	Cv (gpm)	Kv (m³/h)	OPD (bar)		Orifice (mm)	Seal Material	Valve Code
			AC Voltages	DC Voltages			
¼"	0.15	0.13	0 to -0.95	0 to -0.95	2.0	FKM	D363CVEL
¼"	0.24	0.20	0 to -0.95	0 to -0.95	2.5	FKM	D363CVGL
¼"	0.32	0.27	0 to -0.95	0 to -0.95	3.0	FKM	D363CVHL
¼"	0.42	0.36	0 to -0.95	0 to -0.95	4.0	FKM	D363CVLL

Options Available


Valve Options (see coding chart)
Body threaded connection G 1/8"

Seal Material ¹ and Media Temperature Range	Media	Ambient Temperature Range	
		Min	Max
FKM (-10 °C to +130 °C)	Water, oil, air	-10 °C	+50 °C

¹ See corrosion reference guide and sealing solutions for material compatibility. Other seals material on request.

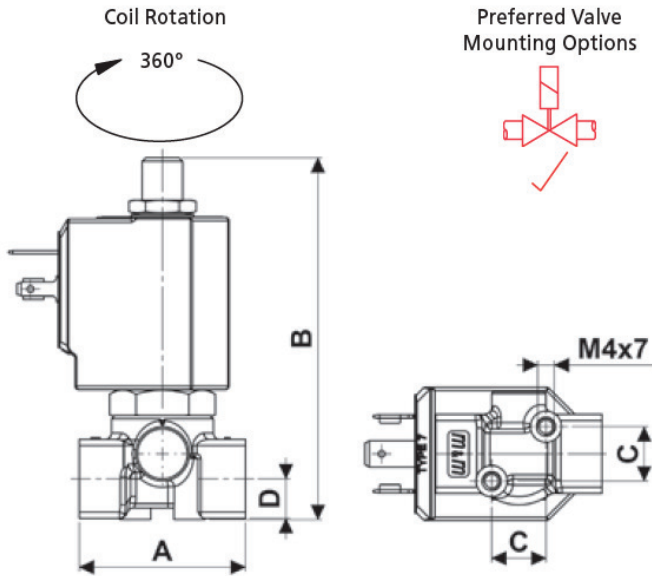

Connection scheme

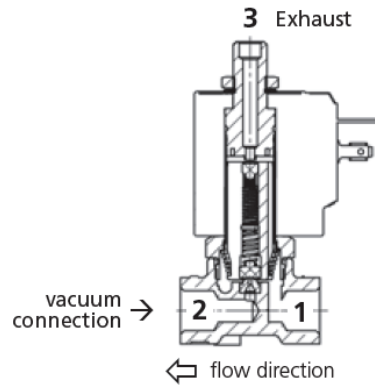

Pipe Size	A	B	C	D	Weight (kg)
1/8" - 1/4"	40	87	13	9.5	0.26

Dimensions (mm)

Solenoid enclosures

7--0 & 7--1 Type Coil - Insulation class F & H

- External material (7--0): PBT (reinforced fiberglass 30%)
- External material (7--1): PPS (glass fiber & mineral filled)
- Electrical connection: DIN EN 175301-803 form A
- Winding insulation: Class H (E180)
- Enclosure classification: Conforms to IP65 (according to EN 60529) with plug and gasket correctly fitted*



7--R cULus Type Coil - Insulation class F

- Encapsulation material: PET 815ER Rynite®
- Electrical connection: DIN EN 175301-803 form A
- Winding insulation: Class H (P180)
- Enclosure classification: Conforms to IP65 (according to EN 60529) with plug and gasket correctly fitted*
- UL approved, file No: E193928



Type 600 011- Plug

- Rated Voltage (max.): 250 VAC / 300 VDC
- Nominal Current: 10A (rated) / 16A (max)
- Wire cross-section: 1.5 mm² max
- Cable Entry: PG9 (6 to 8 mm)
- Enclosure classification: Conforms to IP65 (according to EN 60529) with supplied gasket
- Insulation class: group C- VDE 0110
- Housing colour: black
- UL approved, file No: E205538



* Plug and gasket not supplied as standard, must be ordered separately.

Coding chart

Main Valve Assembly

Pipe Size
2 1/8"
3 1/4"


Orifice
E 2.0
G 2.5
H 3.0
L 4.0

Coil options

Option	Voltage / Frequency - Class F		Voltage / Frequency - Class H	
	w/o option	7250 24 VDC	7251 24 VDC	7201 24 V / 50/60 Hz
	7400 110 V / 50 Hz - 120 V / 60 Hz	7401 110 V / 50 Hz - 120 V / 60 Hz	7600 200 V / 50 Hz - 220 V / 60 Hz	7601 200 V / 50 Hz - 220 V / 60 Hz
	7700 230 V / 50 Hz - 240 V / 60 Hz	7701 230 V / 50 Hz - 240 V / 60 Hz	Voltage / Frequency - Class F - cULus approved	
	725R 24 VDC			
	720R 24 V / 50 Hz			
	740R 110 V / 50 Hz - 120 V / 60 Hz			
	770R 230 V / 50 Hz - 240 V / 60 Hz			

Plug

Plug
w/o plug
0A1 c/w plug



Product coding example:

D362CVGL 7250
1/8" G, auto operation, brass body, FKM seals, 2.5 mm orifice, 24 VDC, without plug.